


Aluminium column SAL MF 7-114

114 mm at the base plate

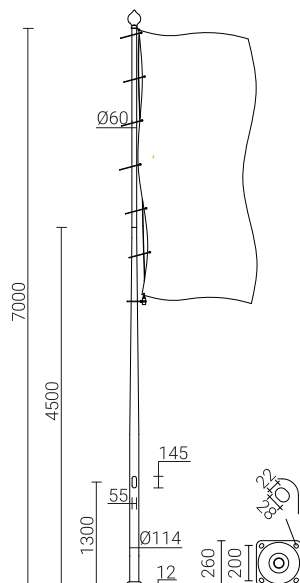

TECHNICAL DATA

Anodising	10 colours
Packing	sleeve material
Diameter at the base plate	114 mm
Finish	brushed anodised aluminium - anode coating thickness is 20µm as standard (coating thickness of 25µm is also possible), option of elastomer protection in column's colour up to a height of 350 mm (other height on customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
Purpose	masts are designed for hanging flags of surface area up to 6 m² according to the technical data sheet
Cord	braided spiral, durable, diameter Ø4 mm, colour: white
Weight	metal, coated with grey coloured plastic
Plastic mounting band	8 pcs as standard (6 pcs + 1 pc on weight + 1 pc on cross-bar)
Wiring chamber	equipped in cord's lock.
Additional accessories	cross-bar for flag - lengths: 1 m, 1,5 m, 2 m; dedicated mast ending



TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42952/C...	SAL MF 7-114	7 m	0.142 m³	B-51 / Z-51	311151 / 311251	4008	20.7 kg

STRENGTH TABLE

SAL MF 7-114-2		location category			
code 42952	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
Surface flag	I zone	I and III zone to 450m AMSL	II zone	III zone to 755m AMSL	
≤ 3 m²	1	1	0	1	
≤ 6 m²	1	1	2	2	

ADDITIONAL EQUIPMENT

Name of product	Cross-bar 1,0 m	Cross-bar 1,5 m	Cross-bar 2,0 m
Product code	4000	4003	4011
Outreach of cross-bar [m]	1,0	1,5	2,0
Net weight [kg]	1,8	2,0	2,2
Approximate volume [m³]	0,01	0,01	0,01



Aluminium column SAL MF 7-114

114 mm at the base plate



ANODISING COLOURS

