


## Low voltage line accessory

### Anchoring and suspension clamp

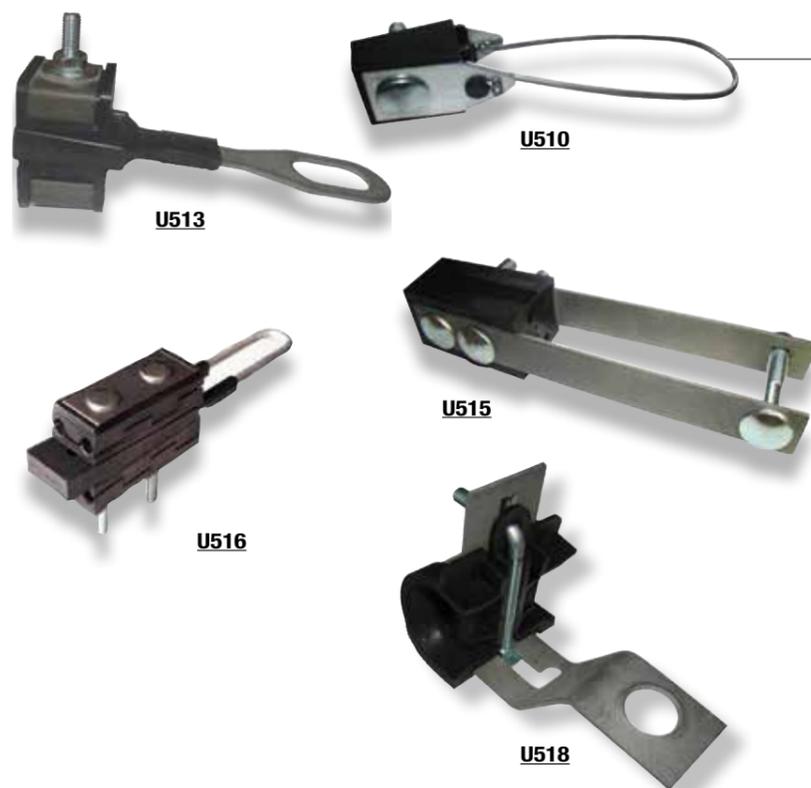

#### Application

These anchoring and suspension clamps are designed to anchor and to hold the A.B.C. (Aerial Bundled Conductors) network.


This range is rather designed to self-supporting cable.

#### Description

- These clamps can be used to fix and hold from 2 up to 4 insulated conductors between a pole and a wall or between two poles.
- Admitted conductors capacities go from 16 up to 120mm<sup>2</sup>.
- Clamps body is made of polymer and the metallic parts are made of hot dip galvanised steel.

Code	Designation	Mechanical resistance (daN)	Section (mm <sup>2</sup> )	Weight (kg)	Sales unit
<b>ANCHORING CLAMP</b>					
U510	ANCHORING CLAMP WITH MOVABLE HANDLE (NUT) 2x10-25	500	2 x 10-25	0.100	100
U511	ANCHORING CLAMP WITH MOVABLE HANDLE (NUT) 4x10-25	700	4 x 10-25	0.105	100
U512	ANCHORING CLAMP WITH CLOSED HANDLE 2x16-35	500	2 x 16-35	0.100	50
U513	ANCHORING CLAMP WITH CLOSED HANDLE 4x16-35	1 000	4 x 16-35	0.140	50
U514	FULLY SUPPORTED ANCHORING CLAMP OPENED HANDLE 4x25-50 EC	2 500	4 x 25-50	0.490	5
U515	FULLY SUPPORTED ANCHORING CLAMP OPENED HANDLE 4x50-95 EC	3 500	4 x 50-95	0.880	5
U516	FULLY SUPPORTED ANCHORING CLAMP CLOSED HANDLE 4x35-70 EC	2 500	4 x 35-70	0.850	5
U517	FULLY SUPPORTED ANCHORING CLAMP CLOSED HANDLE 4x70-120 EC	4 000	4 x 70-120	1.215	5
<b>SUSPENSION CLAMP</b>					
U518	FULLY SUPPORTED SUSPENSION CLAMP 4x10-120	2 500	4 x 10-120	0.343	20

### Suspension bracket

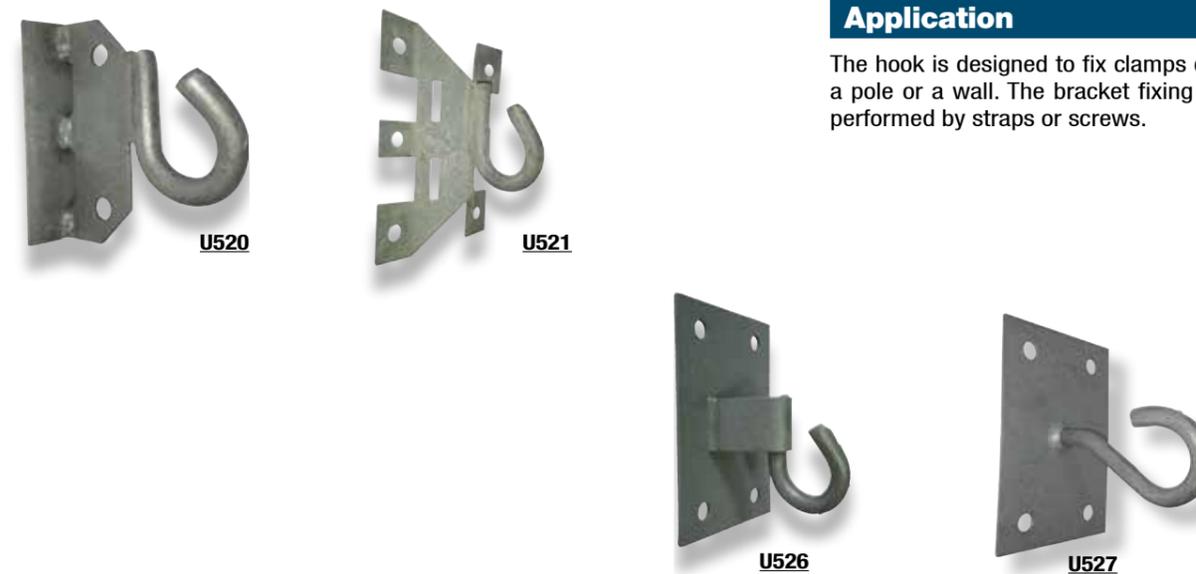

#### Application

The hook is designed to fix clamps on a pole or a wall. The bracket fixing is performed by straps or screws.

Code	Designation	Mechanical resistance (daN)	Section (mm <sup>2</sup> )	Weight (kg)	Sales unit
U520	BRACKET WITH HOOK DIAM 16 6 POLE TYPE	1 800	16	0.380	10
U521	BRACKET WITH HOOK DIAM 16 6 UNIVERSAL	1 800	16	0.330	10
U526	BRACKET WITH SUSPENSION HOOK DIAM 16 -1800 daN	1 800	16	0.570	10
U527	BRACKET WITH SUSPENSION HOOK DIAM 16 -2000 daN	2 000	16	0.440	10

### Hook



#### Application

The hook is used to fix an anchoring clamp on a pole or a wall. It is implemented once holes are drilled.

Code	Designation	Length (mm)	Section (mm <sup>2</sup> )	Weight (kg)	Sales unit
U522	HOOK BOLT DIAM 16 -250	250	16	1.080	10
U523	HOOK BOLT DIAM 20 -250	250	20	1.175	10
U524	HOOK NUT DIAM 16	200	16	0.350	10
U525	HOOK NUT DIAM 20	200	20	0.360	10