


Aluminium column SAL-4 DZ

120 mm at the ground

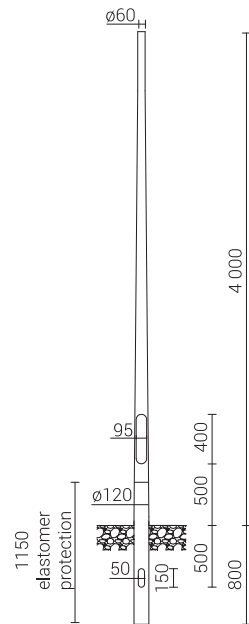

TECHNICAL DATA

Anodising	10 colours
Luminaire mounting	directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Extension arm type	according to resistance calculations
Packing	sleeve material
Performance under vehicle impact (passive safety)	50-NE-C-S-SE-MD-0, 70-NE-C-S-SE-MD-0, 100-NE-C-S-SE-MD-0
Diameter at the base plate	120 mm
Finish	brushed anodised aluminium - anode coating thickness is $20\mu\text{m}$ as standard (coating thickness of $25\mu\text{m}$ is also possible) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm, option of elastomer protection in column's colour up to a height of 350 mm (other height on customer's request)
Ingress protection	IP54 for wire chamber
Diameter of the column ending	$\varnothing 60$ mm




TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Net weight
42231/C...	SAL-4 dz	4 m	4 mm	0.032 m ³	18.3 kg

STRENGTH TABLE

SAL-4 dz			Acceptable windage of single luminaire [m ²] for Cx=1			
code 42231			Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
code of extension arm	type of extension arm	permissible weight of a single luminaire [kg]	zone I, terrain category II	zone I & III, terrain category II up to 450m a.s.l	zone II, terrain category II	zone III, terrain category II up to 755m a.s.l.
-	-	20	0,93	0,78	0,64	0,55
471040	WA-4	10	0,61	0,48	0,37	0,30
471051	WA-5/1	10	0,33	0,26	0,20	0,16
471052	WA-5/2	8	0,23	0,17	0,12	0,09
471141	WA-14/1	10	0,43	0,34	0,26	0,21
471142	WA-14/2	8	0,34	0,25	0,19	0,14
471201	WA-20/1	10	0,22	0,15	0,10	0,07
471041	WA-41 fi42	10	0,62	0,49	0,38	0,31
472041	WR-4/1/0,6/15	15	0,35	0,28	0,23	0,19
472042	WR-4/2/0,6/15	8	0,37	0,30	0,24	0,20
47204105	WR-4/1/0,5/5	15	0,39	0,32	0,26	0,22
47204205	WR-4/2/0,5/5	8	0,40	0,32	0,26	0,22
4720419	WR-4/1/0,6/15 ZP	15	0,35	0,28	0,23	0,19
4720429	WR-4/2/0,6/15 ZP	8	0,37	0,30	0,24	0,20
472041059	WR-4/1/0,5/5 ZP	15	0,39	0,32	0,26	0,22
472042059	WR-4/2/0,5/5 ZP	8	0,40	0,32	0,26	0,22
472071	WR-7/1/0,5	15	0,47	0,38	0,30	0,25
472072	WR-7/2/0,5	8	0,37	0,30	0,24	0,20
472831	WR-8B/1/0,35/0	12	0,39	0,31	0,25	0,21
472841	WR-8B/1/0,35/5	12	0,39	0,31	0,25	0,21
472851	WR-8B/1/0,35/10	12	0,39	0,32	0,25	0,21
472221	WR-10/1/0,85/0	-			ISKRA LED	
472222	WR-10/2/0,85/0	-			ISKRA LED	
4722419	WR-10P/1/0,85/0 ZP	-			ISKRA LED	

Aluminium column SAL-4 DZ

120 mm at the ground



SAL-4 dz			Acceptable windage of single luminaire [m²] for Cx=1			
code 42231			Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
code of extension arm	type of extension arm	permissible weight of a single luminaire [kg]	zone I, terrain category II	zone I & III, terrain category II up to 450m a.s.l	zone II, terrain category II	zone III, terrain category II up to 755m a.s.l.
4722429	WR-10P/2/0,85/0 ZP	-	ISKRA LED			
473010	WN-1	15	0,89	0,73	0,59	0,51
473020	WN-2	8	0,44	0,36	0,29	0,25

ANODISING COLOURS

