


Aluminium column SAL-11 Wł 1/1,5/4,7/5

176 mm at the base plate

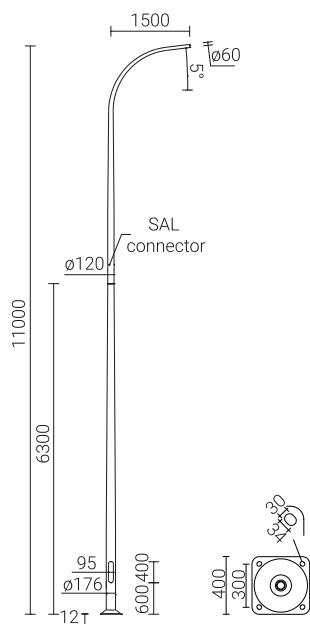

TECHNICAL DATA

Anodising	10 colours
Luminaire mounting	directly on the extension arm, luminaires with $\varnothing 60$ mm mounting with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Packing	sleeve material
Performance under vehicle impact (passive safety)	50-NE-C-S-SE-MD-0, 70-NE-C-S-SE-MD-0, 100-NE-C-S-SE-MD-0
Diameter at the base plate	176 mm
Finish	brushed anodised aluminium - anode coating thickness is $20\mu\text{m}$ as standard (coating thickness of $25\mu\text{m}$ is also possible), option of elastomer protection in column's colour up to a height of 350 mm (other height on customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
Ingress protection	IP54 for wire chamber




TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42451/C...	SAL-11 Wł 1/1,5/4,7/5	11 m	0.82 m³	B-71 / Z-71	311171 / 311271	4012	60.7 kg

STRENGTH TABLE

SAL-11 Wł 1/1,5/4,7/5		Acceptable windage of single luminaire[m²] for Cx=1			
code 42451	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
Permissible weight of a single luminaire [kg]	zone I, terrain category III	zone I & III, terrain category III up to 450m a.s.l	zone II, terrain category III	zone III, terrain category III up to 755m a.s.l.	
15	0,28	0,19	0,12	0,08	

ANODISING COLOURS

